

Concrete and Masonry Anchors

SPArtan™ SILL PLATE ANCHOR (U.S. PATENT NO. 11,236,775)

PRODUCT FEATURES:

SPArtan™ Sill Plate Anchors are post-installed anchors used to attach the sill plate of a wood framed wall to a concrete foundation/curb and rim boards to concrete/CMU walls. SPArtan™ anchors are made from carbon steel wire and have a smooth shank shoulder (5/8" diameter x 1-1/2" long) at the top for sill plate and rim board attachments. This transitions into a threaded shank (3/8" diameter x 6" long) for concrete foundation/curb and concrete/CMU wall attachments. The head is comprised of a 1-1/4" diameter flange and a 3/8" square recess for easy anchor installation. SPArtan™ anchors are designed to resist shear and tension loads due to wind and seismic forces in cracked and uncracked concrete.

MATERIAL:

Hardened Carbon steel

COATING:


GEOMET®, Superior to HDG

INSTALLATION:


See below

CODE COMPLIANCE:

TER 0910-01, FL 3557

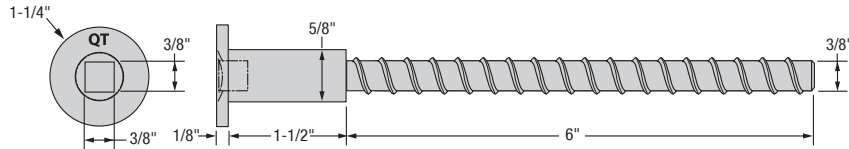

SPA67

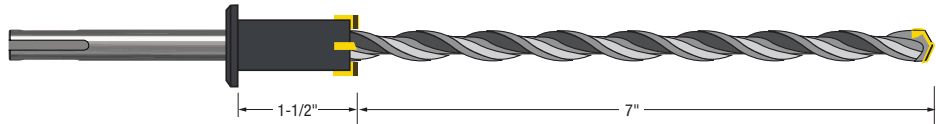

DBMSPA67

PART NO.	CARTON QTY.
SPA67-100DB	100 SPArtan™, 1 SPArtan™ Drill Bit
SPA67-100	100 SPArtan™
SPA67-50	50 SPArtan™
DBMSPA67	1 SPArtan™ Drill Bit



CAUTION: Use of the SPArtan™ Drill Bit is recommended. Oversizing of holes drilled in either the wood sill plate or concrete will reduce the load capacity of the anchor. The SPArtan™ Drill bit is a proprietary, carbide-tipped step bit, custom designed for the installation of the SPArtan™ anchors.

SPArtan™ ANCHOR ALLOWABLE SHEAR VALUES (ASD)

Applied Load	Allowable Loads (LB) ¹⁻⁶	
	Load Direction	Slab/Curb ⁷
Shear	Parallel to Wood Grain (F ₁)	1,395
	Perpendicular to Wood Grain (F ₂)	665
Tension	Uplift (U)	1,155
	Uplift (U) with Washer ⁸	1,705

NOTES:

- Tabulated values are applicable to uncracked concrete and pressure treated Southern Pine #2 lumber.
- Allowable load values are determined using a conversion factor (ASD) of 1.6. The conversion factor is based on the controlling load case: $(0.9D + W) / (0.6D + 0.6W)$, where Dead Load (D) = 30% and Wind Load (W) = 70%. Adjustments shall be made where other load combinations control.
- Anchor design conforms to ACI 318 with no supplementary reinforcement considered.
- Anchor bending yield strength, $F_{yb} = 100,000$ psi and concrete dowel bearing strength, $F_d = 7,500$ psi.
- Allowable loads are provided for a 1.6 load duration (C_D). No further increases are permitted.
- Allowable loads use a wet service factor $C_M = 0.7$ (M.C. > 19%). No further reduction required.
- Minimum Requirements: Edge distance = 2.25 inches, End distance = 6 inches, Spacing = 6.75 inches, Embedment depth = 6 inches, Curb width = 6 inches, Slab/Curb depth = 9 inches and Concrete compressive strength = 2,500 psi.
- Washer size is 2 inch x 2 inch x 1/8 inch.



2" x 2" x 1/8" Washer

